


Test of cables and adapters with the NanoVNA SAA v2




1

300 MHz to 3400 MHz


BNC and SMA plugs on white teflon coax

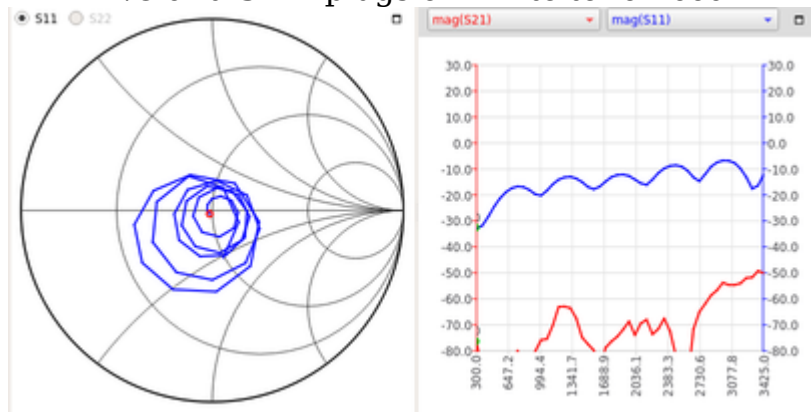


Good commercial SMA 350mm lead, white coax

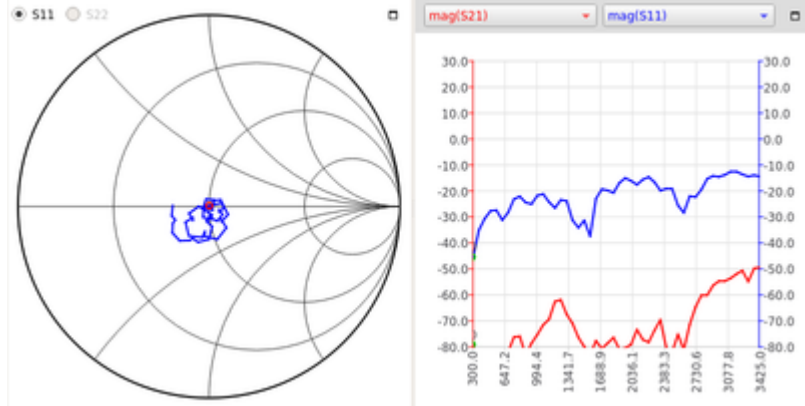


Cheap 180mm SMA patch lead #1

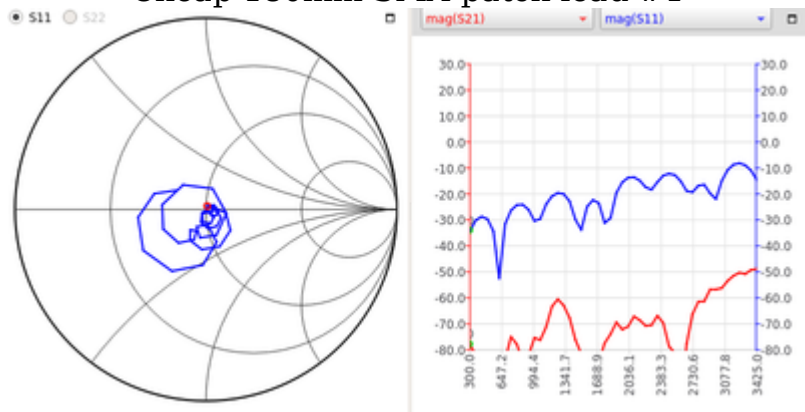


Cheap 180mm SMA patch lead #2

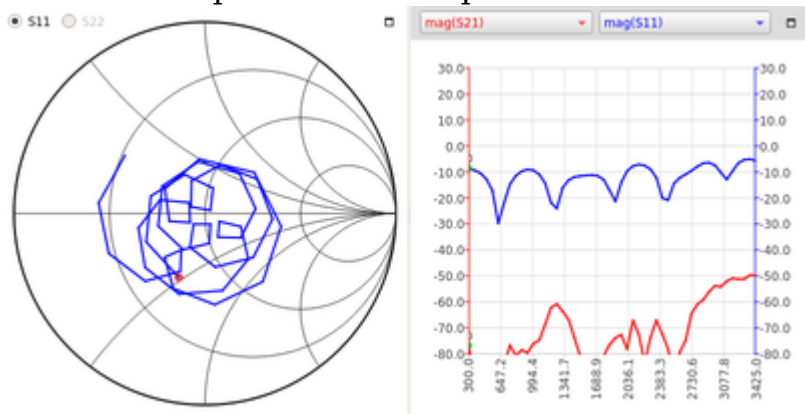


adapter BNC plug to SMA socket

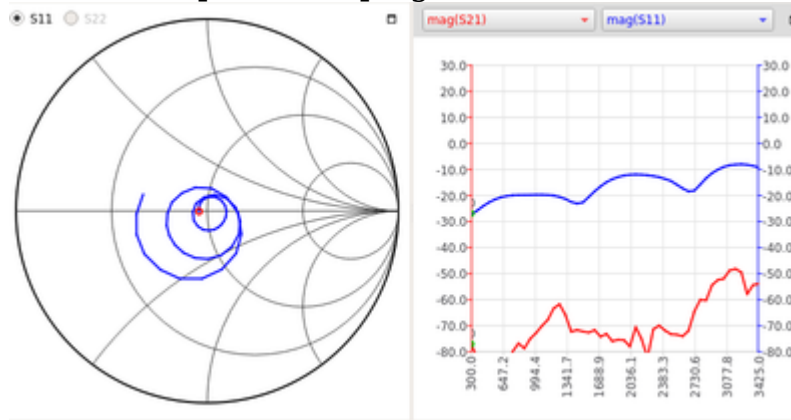


adapter BNC socket to SMA socket

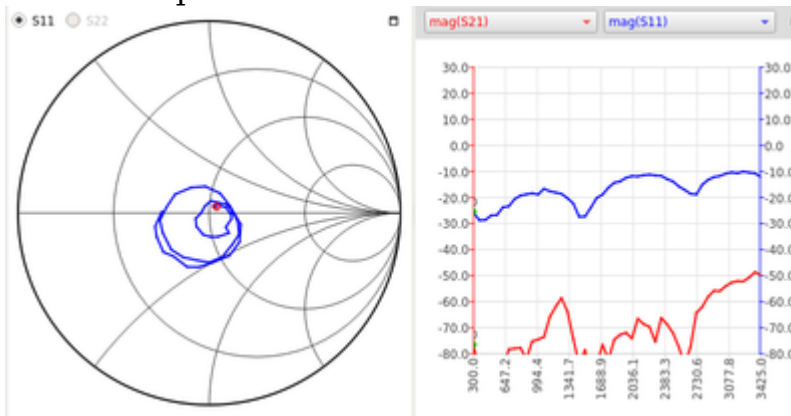


adapter SMA plug to BNC plug

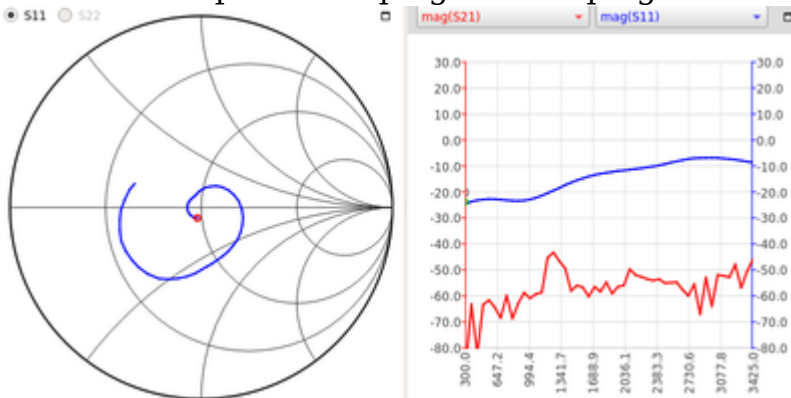

adapter SMA socket to BNC plug

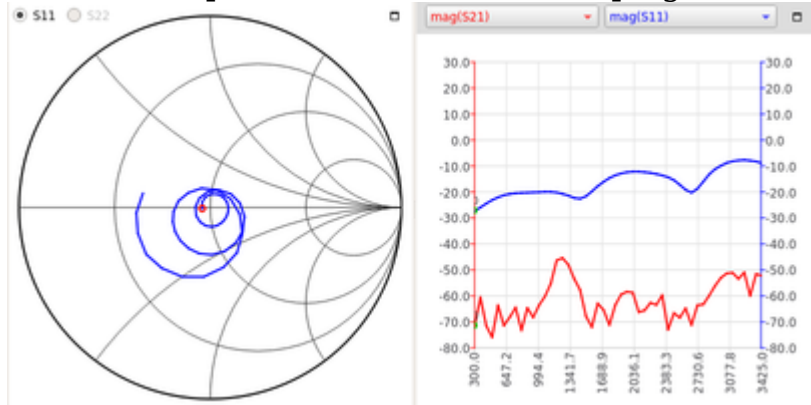

adapter pair SMA to BNC and BNC to SMA

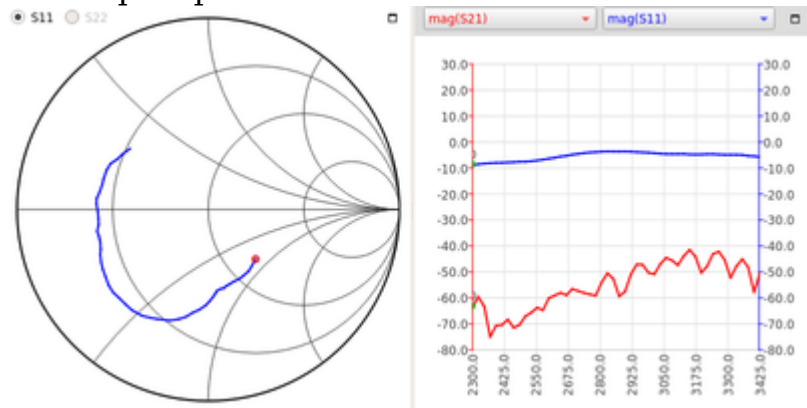

Both N to SMA leads using 6mm teflon coax, FUJIKURA RG-55/U, very good

weasyprint 1index.html xxx2.pdf